
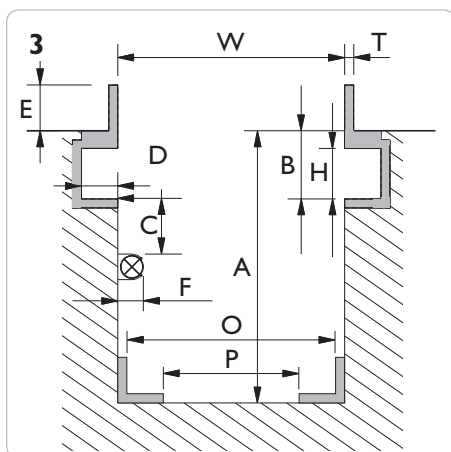
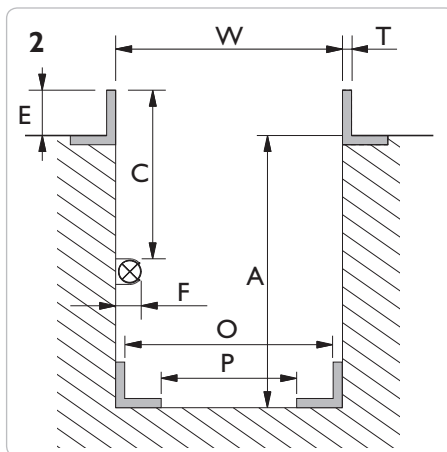


PIT SPECIFICATION FORM

PRODUKT: **GD** - Pit jack 10 t 15 t 20 t **FL** - Heavy duty jacking beam 6 t 12 t 16 t 20 t
GGD - Floor pit jack 15 t **SD** - Jacking beam 2 t 2,6 t 4 t
AB - Support bridge 20 t

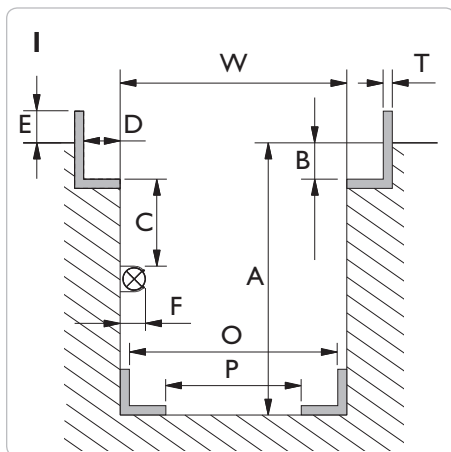

4 Drawing

Drawing no.: _____

Please measure various places along the length of the pit. **Max 12 mm variation between W min og W max. throughout the pit length**

W min. = _____ mm

W max. = _____ mm

A min. = _____ mm


B = _____ mm

D = _____ mm

E = _____ mm

H = _____ mm

T = _____ mm

If the pit is mounted with light  or other obstructing parts, please fill out C and F:

C min. = _____ mm

F max. = _____ mm

GGD - Floor pit jack

O min. = _____ mm

O max. = _____ mm

P min. = _____ mm

P max. = _____ mm

Placing of saddle

The placing of top saddle **excluding** cross beam adaptor, safety stand and extensions is required:

above workshop floor _____ mm

levelling with workshop floor

below workshop floor _____ mm

The top of the cylinder will be positioned +/- 50 mm according to requested level

Option

Please note, mounting of different options will increase the min. height:


Cross beam adaptor T4 = 90 mm

Cross beam adaptor T5 = 136 mm


Cross beam adaptor T6 = 90 mm

Safety stand S200 = 65 mm

Rolltype / Rail profile



Conical/
tilted



Cylindrical/
straight

PLEASE NOTE: It is the customer's responsibility that the given measures are correct and sufficient and that the pit is built and anchored to withstand the designated loading.

Date:

Measured by:

Dealer:

Signature: